

## MORTISE CYLINDER SWITCH STATIONS FOR ACCESS CONTROL APPLICATIONS


### MODEL MCK-3

- 1.75 INCH STAINLESS STEEL FRONT PLATE FOR NARROW STILES
- S.P.D.T. MOMENTARY SWITCH, RATED 4 A. @ 28 VDC, UL/CSA LISTED
- 8 INCH COLOR CODED STRANDED WIRE SWITCH LEADS
- RED AND GREEN LEDS OPERATE ON 12 OR 24 VOLTS
- TAMPER-PROOF AND SLOTTED HEAD SCREWS INCLUDED



### MODEL MCK-4

- SINGLE GANG STAINLESS STEEL FRONT PLATE
- S.P.D.T. MOMENTARY SWITCH, RATED 4 A. @ 28 VDC, UL/CSA LISTED
- 8 INCH COLOR CODED STRANDED WIRE SWITCH LEADS
- PROVISION FOR A S.P.D.T. TAMPER SWITCH, RATED 5 A. @ 125 VAC
- WALLPLATE RETAINER INCLUDED
- TAMPER-PROOF AND SLOTTED HEAD SCREWS INCLUDED

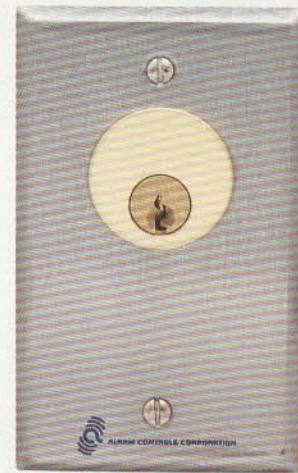

### MODEL MCK-5

- SINGLE GANG STAINLESS STEEL FRONT PLATE
- S.P.D.T. MOMENTARY SWITCH, RATED 4 A. @ 28 VDC, UL/CSA LISTED
- 8 INCH COLOR CODED STRANDED WIRE SWITCH LEADS
- PROVISION FOR A S.P.D.T. TAMPER SWITCH, RATED 5 A. @ 125 VAC
- GREEN LED OPERATES ON 12 OR 24 VOLTS
- WALLPLATE RETAINER INCLUDED
- TAMPER-PROOF AND SLOTTED HEAD SCREWS INCLUDED

