

RELAYS

FOR ALL SECURITY SYSTEM APPLICATIONS

3000 SERIES HIGH CURRENT RELAYS

UL RECOGNIZED RELAYS



CONTACT ARRANGEMENT: S.P.D.T. 1 FORM C

CONTACT RATING: 30 AMPERES @ 28VDC OR 120 VAC

TEMPERATURE RANGE: -20 DEG. C TO 85 DEG. C

SIZE: H 1.25" X 1.75" X 3"

MOUNTING: DOUBLE SIDED FOAM TAPE, (SUPPLIED), OR OPTIONAL SNAPTRACK®

SPECIAL FEATURES: OPERATES ON AC OR DC, PROTECTION DIODE, RUGGED, CONSTRUCTION, VIBRATION RESISTANT RELAY ASSEMBLY, LED "COIL ENERGIZED" INDICATOR.

MODEL	VOLTAGE	MIN.	MAX.	COIL RES.	CURRENT DRAW
3012	12 AC/DC	9.6	14.4	150 OHMS	80 MA.
3024	24 AC/DC	19.2	28.8	660 OHMS	36 MA.

7000 SERIES QUAD SNAP-A-PART RELAY MODULES

UL RECOGNIZED RELAYS

CONTACT ARRANGEMENT: D.P.D.T. 2 FORM C


CONTACT RATING: 5 AMPERES @ 30 VDC OR 240 VAC

TEMPERATURE RANGE: -40 DEG. C TO +85 DEG. C

SIZE: 1.5" X 1.5" L X 3" W

MOUNTING: DOUBLE SIDED FOAM TAPE, (SUPPLIED), OR OPTIONAL SNAPTRACK®

SPECIAL FEATURES: LED "COIL ENERGIZED" INDICATOR, POLARITY DIODE, COIL PROTECTION DIODE.

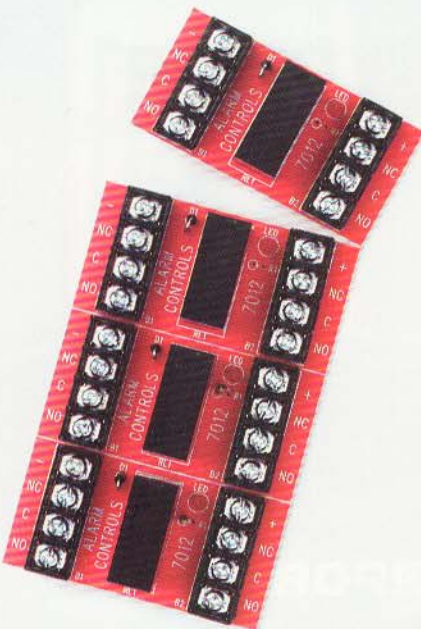

MODEL	VOLTAGE	MIN.	MAX.	COIL RES.	CURRENT DRAW
7006	6 VDC	4.6	7.2	50 OHMS	120 MA.
7012	12 VDC	9.6	14.4	200 OHMS	60 MA.
7024	24 VDC	19.2	28.8	820 OHMS	30 MA.