

ELECTRONIC TIMERS FOR ALL TIMING APPLICATIONS

MODEL TALENTO 800

FUNCTIONAL DESCRIPTION

THE TALENTO 800 CONTROL IS AN ELECTRONIC TIME SWITCH WITH ONE CHANNEL THAT IS FREELY PROGRAMMED WITH A TOTAL OF 400 SCHEDULES.

THE LOAD STATUS, TIME OF DAY, AND DATE ARE DISPLAYED ON A LARGE LCD READOUT.

IN ADDITION TO CONVENTIONAL "ON/OFF" PROGRAMMING, THE UNIT PROVIDES A "PULSE" AND "CYCLE" FUNCTION.

THE TALENTO 800 TIME CONTROL CAN BE PROGRAMMED WITH A 24 HOUR, 7 DAY, OR A 365 - DAY SCHEDULE (WITH INDIVIDUAL HOLIDAYS OR HOLIDAY/ VACATION PERIODS).

THIS CONTROL INCORPORATES A CALENDAR THROUGH THE YEAR 2095 AND ALSO INCLUDES AUTOMATIC LEAP YEAR ADJUSTMENT.

THE ANNUAL DAYLIGHT SAVINGS/STANDARD TIME CHANGES CAN BE PROGRAMMED TO OCCUR AUTOMATICALLY EACH YEAR THROUGH 2095.

SPECIFICATIONS

INPUT VOLTAGE: 24 VOLTS AC/DC

POWER CONSUMPTION: 5 VA

RELAY CONTACT RATING: 16 A @ 24/250 VOLTS AC

OUTPUT RELAY: SINGLE POLE-DOUBLE THROW

BATTERY BACKUP LIFE: 6 YEARS, (REPLACEABLE)

DISPLAY: AM/PM, LIQUID CRYSTAL, 1 x 1 11/16 INCHES


TEMPERATURE RANGE: - 13 F TO 131 F

SIZE AND INSTALLATION


THE TALENTO 800 TIMER REQUIRES APPROXIMATELY 4" x 4" OF SPACE. ITS HOUSING PROVIDES FOR SURFACE OR DIN RAIL MOUNTING INSIDE CONTROL PANELS OR FOR STAND ALONE INSTALLATIONS. IT IS ALSO AVAILABLE WITH AN INDOOR ENCLOSURE.

CONTACT ARRANGEMENT

THE STANDARD UNIT HAS ONE SET OF SINGLE POLE - DOUBLE THROW DRY CONTACTS. TWO AND FOUR CIRCUIT UNITS ARE AVAILABLE.

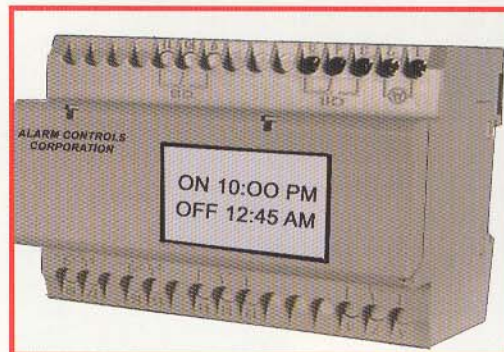

OPTIONAL ENCLOSURE MODEL DIGI-300

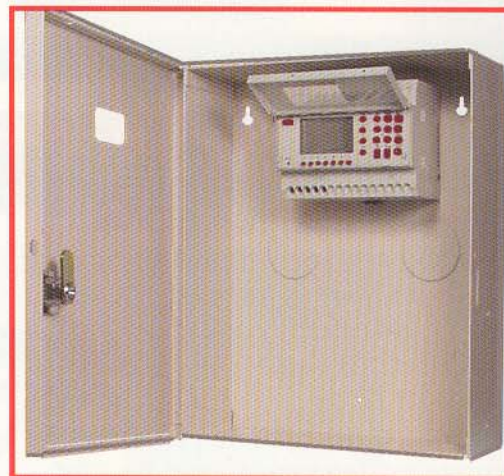

CABINET DIMENSIONS

HEIGHT: 11 INCHES

WIDTH: 9 INCHES

DEPTH: 3 INCHES

**CABINET IS SUPPLIED WITH
CAMLOCK AND TWO KEYS**

ALARM CONTROLS CORPORATION

"QUALITY SECURITY EQUIPMENT SINCE 1971"

19 BRANDYWINE DRIVE, P.O. BOX 280, DEER PARK, NEW YORK 11729

1 800 645-5538 631 586-4220 FAX 631 586-6500

EMAIL: INFO@ALARMCONTROLS.COM WWW.ALARMCONTROLS.COM