

VANDAL RESISTANT PUSH PLATES


FOR ACCESS CONTROL APPLICATIONS



SINGLE GANG STYLE



NARROW STYLE

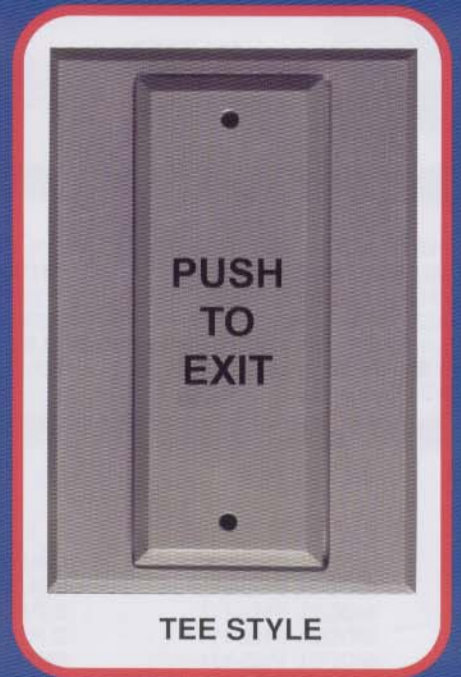


TEE STYLE

- NARROW STYLE
- TEE STYLE
- SINGLE GANG STYLE
- COLOR FILLED ENGRAVED LEGENDS
- HEAVY DUTY SOLID ALUMINUM PLATES
- ANODIZED TO INHIBIT CORROSION
- VANDAL RESISTANT MOUNTING
- PNEUMATIC TIME DELAY SWITCH MODELS
- SINGLE POLE AND DOUBLE POLE SWITCH MODELS
- FIVE ARCHITECTURAL FINISHES
- CUSTOM ENGRAVING AVAILABLE



ALARM CONTROLS CORPORATION
DEER PARK, NEW YORK
11729

VANDAL RESISTANT PUSH PLATES FOR ACCESS CONTROL EXIT RELEASE APPLICATIONS

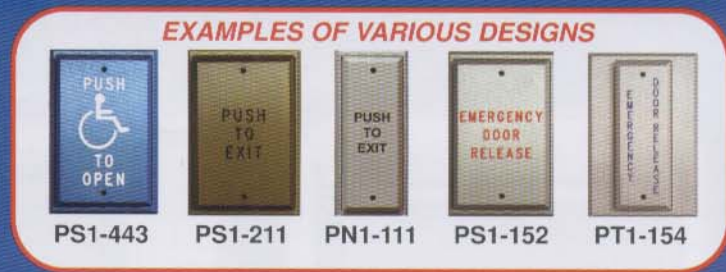

SPECIFICATION GUIDE
 PUSH PLATE EXIT RELEASE STATION SHALL BE MANUFACTURED BY ALARM CONTROLS CORPORATION . PUSH PLATE EXIT RELEASE STATIONS SHALL BE MOMENTARY OR LATCHING. S.P.D.T OR D.P.D.T., 4A. @ 28VDC. PNEUMATIC TIME DELAY PUSH PLATES SHALL BE FIELD ADJUSTABLE FROM 2 TO 60 SECONDS WITH ONE N/O AND ONE N/C CONTACT RATED 10A. @ 35 VDC. ALL SWITCH ASSEMBLIES SHALL BE PROVIDED WITH 10 INCH COLOR CODED WIRE LEADS. PUSH PLATES SHALL BE CONSTRUCTED OF MACHINE ANODIZED ALUMINUM WITH CONCEALED VANDAL RESISTANT MOUNTING. MOUNTING SCREWS SHALL BE ALLEN HEAD TYPE WITH A SUITABLE HEX KEY PROVIDED. SINGLE GANG STYLE AND T STYLE PUSH PLATES MOUNT TO STANDARD RECESSED ELECTRICAL WALL BOXES.

MODELS

NARROW STYLE

- MODEL PN1-111
- MODEL PN2-111
- MODEL PN3-111
- MODEL PN4-111
- MODEL PN5-111

SWITCH DESCRIPTION

- S.P.D.T. MOMENTARY CONTACTS, RATED 4 A. @ 28 VDC
- D.P.D.T. MOMENTARY CONTACTS, RATED 4 A. @ 28 VDC
- S.P.D.T. LATCHING CONTACTS, RATED 4 A. @ 28 VDC
- D.P.D.T. LATCHING CONTACTS, RATED 4A. @ 28 VDC
- PNEUMATIC TIME DELAY, TIME RANGE 2-60 SECONDS, 1 N/O & 1 N/C CONTACT, CONTACTS RATED 10A. @ 35 VDC

TEE STYLE

- MODEL PT1-111
- MODEL PT2-111
- MODEL PT3-111
- MODEL PT4-111
- MODEL PT5-111

- S.P.D.T. MOMENTARY CONTACTS, RATED 4 A. @ 28 VDC
- D.P.D.T. MOMENTARY CONTACTS, RATED 4 A. @ 28VDC
- S.P.D.T. LATCHING CONTACTS, RATED 4A. @ 28 VDC
- D.P.D.T. LATCHING CONTACTS, RATED 4A. @ 28 VDC
- PNEUMATIC TIME DELAY, TIME RANGE 2-60 SECONDS, 1 N/O & 1 N/C CONTACT, CONTACTS RATED 10A. @ 35 VDC

SINGLE GANG STYLE

- MODEL PS1-111
- MODEL PS2-111
- MODEL PS3-111
- MODEL PS4-111
- MODEL PS5-111

- S.P.D.T. MOMENTARY CONTACTS, RATED 4A. @ 28 VDC
- D.P.D.T. MOMENTARY CONTACTS, RATED 4A. @ 28 VDC
- S.P.D.T. LATCHING CONTACTS, RATED 4A. @ 28VDC
- D.P.D.T. LATCHING CONTACTS, RATED 4A. @ 28 VDC
- PNEUMATIC TIME DELAY, TIME RANGE 2-60 SECONDS, 1 N/O & 1 N/C CONTACT, CONTACTS RATED 10A. @ 35 VDC

ALL STANDARD MODELS ARE CLEAR ANODIZED, ENGRAVED "PUSH TO EXIT", BLACK FILL, (AS SHOWN ON FRONT)

OPTIONS		
FINISH	ENGRAVING	FILL
CLEAR 1	PUSH TO EXIT	1 BLACK 1
BRONZE 2	PUSH TO OPERATE	2 RED 2
BRASS 3	PUSH TO OPEN	3 WHITE 3
BLUE 4	ADA SYMBOL	4 BLUE 4
BLACK 5	EMERGENCY DOOR	
RED 6	RELEASE	

HOW TO ORDER
 SELECT A MODEL AND SUBSTITUTE THE OPTION NUMBERS TO OBTAIN THE REQUIRED PART NUMBER.
 FOR EXAMPLE: SINGLE GANG STYLE WITH D.P.D.T. MOM. SW., BRASS FINISH, "PUSH TO OPERATE", RED FILL.

MODEL	FINISH	ENGRAVING	FILL
PS2	3	2	2

PART NUMBER PS2-322

ALARM CONTROLS CORPORATION

IF YOU NEED IT, WE WILL MAKE IT
 "QUALITY SECURITY EQUIPMENT SINCE 1971"

19 BRANDYWINE DRIVE, P.O. BOX 280, DEER PARK, NEW YORK 11729
 1 800 645-5538 631 586-4220 FAX 631 586-6500
 EMAIL: INFO@ALARMCONTROLS.COM WWW.ALARMCONTROLS.COM