


MODEL AM3325 ADJUSTABLE ANGLE BRACKET INSTALLATION INSTRUCTIONS



1. Remove the header plate from the lock by loosening the captive fasteners located at each end of the lock.
2. Insert the lock into the key holes on the bracket.
3. Adjust the position of the lock and the bracket and secure the lock to the bracket using the captive fasteners.

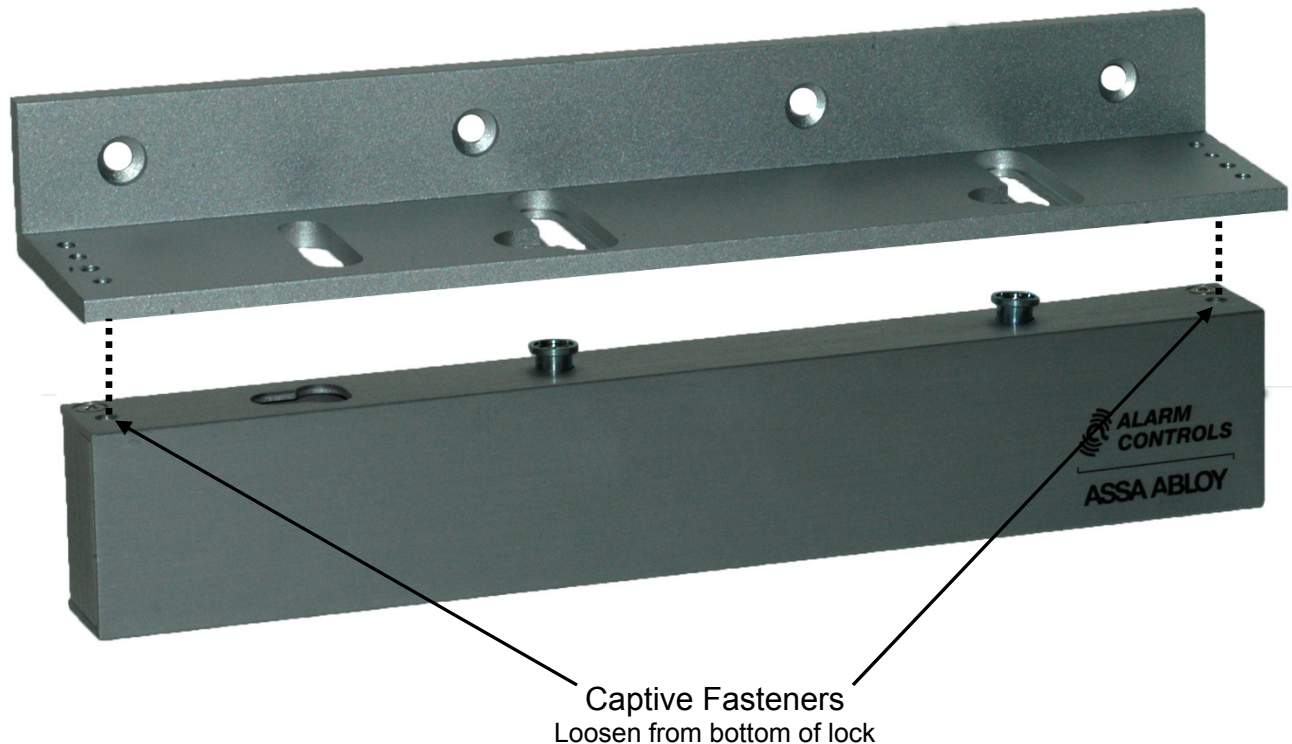

Alarm Controls Corporation
Deer Park, New York 11729
(800) 645-5538
www.alarmcontrols.com

ASSA ABLOY, the global leader
in door opening solutions