


DL-1, DL-2

Armored Door Loops

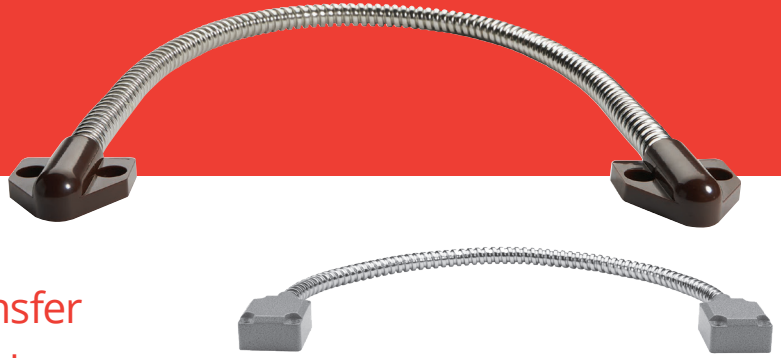

18" armored door loop used to transfer low-voltage electrical current from the door frame to the door. Available with either plastic (DL-1) or aluminum alloy (DL-2) end caps. Mounting hardware included.

Features

Standard Features

- 18" long armored door loop
- Mounting hardware included
- End Caps:
 - **DL-1:** white and brown plastic
 - **DL-2:** aluminum alloy
- Steel jacket resists abrasion and damage
 - **DL-1:** .250 I.D. steel
 - **DL-2:** rugged .375 I.D steel

Optional Features

- Custom lengths available
- **DL-2ELECTRO** DL-2 with ElectroLynx connector
- **DL-24** DL-2 w/ 24" armored door loop
- **DL-30** DL-2 w/ 30" armored door loop
- **DL-36** DL-2 w/ 36" armored door loop
- **DL-48** DL-2 w/ 48" armored door loop
- **DL-60** DL-2 w/ 60" armored door loop

4152

Kill Switch

- Provides a safe and convenient way to disconnect panel power by removing power from back-up battery and AC source
- DPST toggle switch with 10 Amp contacts
- Unique clip allows quick and easy installation



CL-3

Camlock

- Used to secure control panel from tampering
- 1" cam
- Supplied with two single bitted flat keys, keyed alike
- Steel chrome plated lock
- Speed clip secures cam lock to panel cover
- Optional **CL-3 (50)** multi pack of 50



DL2EC

Door Loop Accessory

- DL-2 End Cap only



AC25

Armored Cables

- 25' long
- 0.1875 I.D. Armored Cable



AC30

Armored Cables

- 30' long
- .375 I.D Armored Cable

